



CONAN

**SUPERIOUR COLOUR MIXING
EXCEPTIONALLY SMOOTH PROJECTION**




The CLF Conan is an innovative concept which combines superior RGBW colour mixing and smart design. Specially selected high quality Osram LEDs provide deep, saturated colors with an outstanding white balance and the distinct lens design takes care of the exceptionally smooth projection. Guaranteed flicker free operation makes the Conan suitable for tv shows, theatre and corporate events. The Conan features a very quick zoom function with a wide range of 11° to 58°. The unique shape of the Conan prevents cables to be in sightlines. The fixture has a double bracket so it can be placed on the floor or mounted to truss structures by using the unique CLF quicklock system. This hanging system is easy to use and time-saving. A clear LCD display on the back of the Conan gives access to all settings, including 4 different dimmer curves. Controlled by DMX, the Conan

offers extensive colour temperature control and a pre-programmed FX engine. Standard the Conan comes with 5p XLR connectors, but can be easily swapped to 3p XLR using the supplied board. Available accessories are a detachable snoot, barndoor and a Wireless Solution W-DMX™ receiver. All in all, the CLF Conan is the only choice for professional and high demanding users.



CLF CONAN

- » VERY FAST AND WIDE ZOOM 11° - 58°
- » RGBW COLOUR MIXING BEHIND THE LENS
- » DOUBLE BRACKET FOR FLOOR OR TRUSS MOUNTING
- » UNIQUE & SMART DESIGN
- » UNIQUE CLF QUICKLOCK SYSTEM
- » FLICKER FREE OPERATION
- » WIRELESS (OPTIONAL)

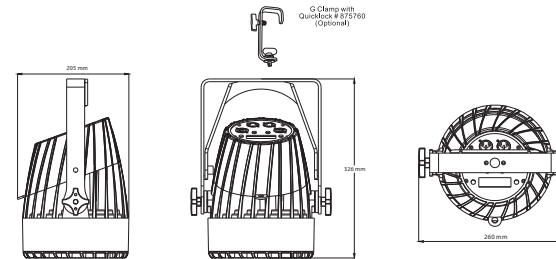

Small Zoom Flux out: 1097 lm			
Height	Eavg,Emax	Angle: 8.70°	Diameter
9.843ft	471.1,670.2fc		1.497ft
3m	5071,7214lx		45.64cm
13.12ft	265.0,377.0fc		1.997ft
4m	5071,7214lx		60.85cm
16.40ft	169.6,241.3fc		2.496ft
5m	1825,2597lx		76.07cm
19.69ft	117.8,167.5fc		2.995ft
6m	1268,1803lx		91.28cm
22.97ft	86.53,123.1fc		3.494ft
7m	931.4,1325lx		106.55cm

Wide Zoom Flux out: 949.5 lm			
Height	Eavg,Emax	Angle: 33°	Diameter
3.281ft	380.4,445.9fc		1.097ft
1m	3233,4799lx		59.24cm
6.562ft	75.10,111.5fc		3.88ft
2m	808.3,1200lx		118.49cm
9.843ft	33.38,49.54fc		5.83ft
3m	359.3,533.2lx		177.73cm
13.12ft	18.77,27.87fc		7.77ft
4m	202.1,299.9lx		236.97cm
16.40ft	12.02,17.83fc		8.71ft
5m	129.3,192.0lx		296.21cm



FACTSHEET

- DMX channels 10 or 21 channels
- Beam angle 11° - 58° (quick zoom)
- Power supply Max. 110 WAC
- Power consumption Max. 110 Watt
- Cooling Low noise regulated fan
- DMX connection 3 & 5p XLR in & out
- Dimensions 326 x 260 x 205 mm (hwxwx)
- Weight 4,8 Kg
- Certification mark CE
- Article number 156130
- Included items Power cable
- IP rating IP22