



LEDWASH RGBW

COMPACT WASH FIXTURE

UNIQUE AND DISTINCTIVE DESIGN



The CLF LEDwash RGBW is a compact wash fixture with a unique and distinctive design. The horizontal head can be manually adjusted 60°. Combined with the 50° beam angle of the lens, the LEDwash is the perfect solution for illuminating large surfaces like walls, curtains and horizons. Special technologies prevent multicolour shadows and provide deep saturated colours. It is also possible to make the beam more diffused by using the included frost lens.

The low and compact housing makes that the fixture is hardly noticeable. The fixture can be placed on the floor or mounted to truss structures by using two pieces of the unique CLF quicklock system. This hanging system is easy to use and time-saving.


The CLF LEDwash contains 9 specially selected LEDs which

provide deep and intense colours. The powerful LEDs provide extremely high light output and ensures 'flicker-free' operation for all types of TV and film use. RGBW and dimming can be controlled in 5 different DMX modes or by using the on board menu. The fixture contains both powerCON in and out and can be connected with three and five pins XLR.



CLF LEDWASH RGBW

- » EXCEPTIONALLY SMOOTH COLOUR MIXING
- » POWERCON IN AND OUT
- » MANUALLY 60° ADJUSTABLE BEAM ANGLE
- » 'FLICKER FREE' OPERATION
- » INTENSE COLOURS DUE TO SPECIALLY SELECTED LEDS
- » CLEAR MENU STRUCTURE FOR OPERATION SETTINGS

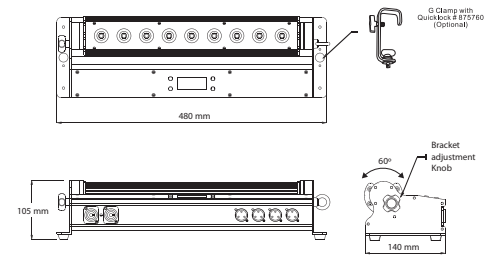

Height	Eavg,Emax	Angle: 52.80°	Diameter
9.843ft	16.47, 26.60ft		9.77ft
3m	177.3, 286.3lx		297.84cm
13.12ft	9.264, 14.96ft		13.03ft
4m	99.72, 161.1lx		397.12cm
16.40ft	5.929, 9.576ft		16.29ft
5m	63.82, 103.1lx		496.40cm
19.69ft	4.117, 6.650ft		19.54ft
6m	44.32, 71.58lx		595.69cm
22.97ft	3.025, 4.886ft		22.80ft
7m	32.56, 52.59lx		694.97cm

Flux out: 1301 lm

FACTSHEET

DMX channels	3, 4, 5, 6 or 11 channels
Beam angle	50 °
Power supply	100 - 240 VAC
Power consumption	Max. 65 Watt
Cooling	Low noise fan
DMX connection	3 & 5p XLR in & out
Dimensions	480 x 140 x 105 mm (hwxwx)
Weight	3,5 Kg
Certification mark	CE
Article number	156200
Included items	Power cable, Frost & Clear lens
IP rating	IP22